

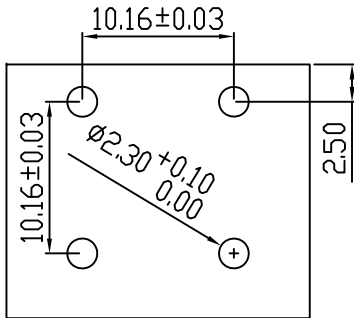
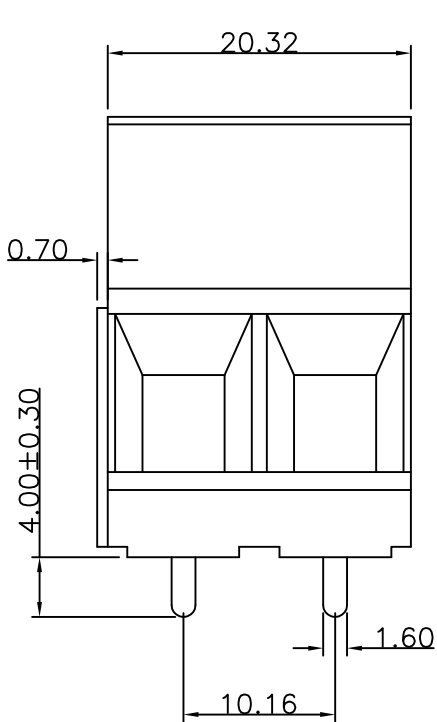


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to	over	over	over	over	over	over		over	over
	6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to	to 10	10 to 100	100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



PCB LAYOUT

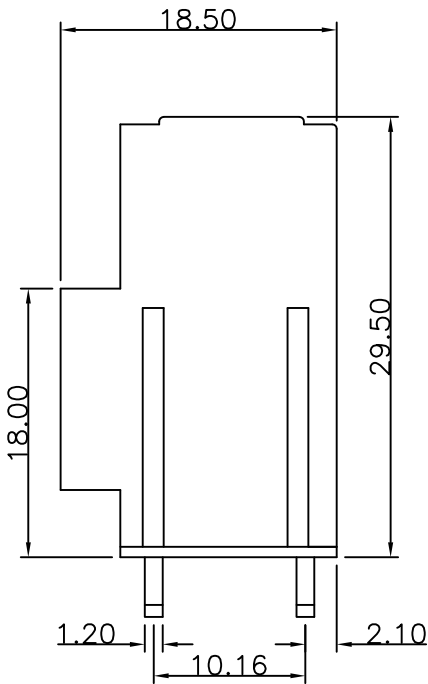

REVISION RECORD				
REV.	DESCRIPTION	ECN NO.	APPROVE	DATE
A	新发行		YXW	2015. 5. 15

UL/CUL 技术参数 UL/CUL Technical Data				
等 级 Use Group	B	C	D	
额定电压 Rated Voltage (V)	300	-	300	
额定电流Rated Current(A)	65	-	10	
接线范围 Wire Range 单/多芯线 Solid/Stranded (AWG)	26-6			
耐电压withstanding VOLTAGE	1600V/Min			
IEC 技术参数 IEC Technical Data				
过电压类别 Overvoltage Category	Ⅲ	Ⅲ	Ⅱ	
污染等级 Contamination Class	3	2	2	
额定电压 Rated Voltage (V)	630	750	1000	
额定电流Rated Current(A)	57	57	57	
额定冲击电压 Impulse Withstand voltagea (KV)	8.0	8.0	8.0	
导线截面积Conductor cross section 硬质/柔性导线 Solid/flexible(mm²)				10.0
材 料 Material				
绝缘材料 Insulation Material	PA66			
阻燃等级 Lmflammability	UL94V-0			
导体材料 Contactor Material	铜合金 Copper alloy			
导体表面镀层 Contactive Coating	镀锡 Tin plated			
一般参数 Other Data				
间 距 Pitch (mm)	10.16			
极 数 Poles (P)	2-24			
剥线长度 Stripping Length(mm)	10			
螺丝 Screw/扭矩 Torque(Max) (N.M)	M4.0/1.2			
工作温度Operating temperatur(° C)	-40--+105			
引针尺寸 Pin Dimensions(mm)	4.00			
PCB板孔径 PCB Hole Diameter(mm)	2.3			

DES.	CLB	DATE	2015. 2. 25	单位/UNITS	MM	时间/SIZE	A4	比例/SCALE	1:1	第三视角/THIRDANGLEPROJECTION		版本/ REV	A
CHK.	LF	DATE	2015. 2. 25	宁波市旭骋电子有限公司 NINGBOSHIXUCHENG ELECTRONIC CO.,LTD						名称/ TITLE		XC135T-10.16	
APP.	YXW	DATE	2015. 2. 25										